

FIFTH WHEEL HITCHES

ELITE™

PRE ASSEMBLED 25K ELITE™



30143



Includes 90° Wire Harness
50-97-410

30142

- 25,000 lbs. cap. / 6,250 lbs. pin weight cap.
- 14" – 16-1/2" vertical adjustment
- Improved 4 way head pivot
- 4° side to side pivot for better control
- Forged single jaw
- Increased king pin/jaw contact design
- Self latching jaw design
- King pin indicator
- Wider footprint for increased stability
- Stamped rounded head
- Wider 9" (vs 6") king pin funnel area on head
- Vehicle specific under bed mounting kits
- Lockable handle (lock sold separately)
- 1/4" turn handle "quick lock" mount system
- Non-pin mounting reduces slop
- Contemporary 21st century appearance
- Folding tab washers for easy installation
- Extended length handle
- Pre-assembled fifth wheel units
- Saves approx. one hour of assembly time
- Foot assembly is hand tightened
- Includes wrench to tighten foot assembly
- Shipped in one convenient carton
- SAE J2638 Compliant
- Limited lifetime warranty

Part No.	Description
30143	25K Elite™

Note: Will not fit trucks with beds shorter than 6' in length unless used with Sidewinder™. Will not fit trucks with flareside/stepside.

PRE ASSEMBLED 18K ELITE™

All 25K features other than gross and pin weight capacity.

- 18,000 lbs. capacity / 4,500 lbs. pin weight capacity • 14" – 18" vertical adjustment



Includes 90° Wire Harness
50-97-410

30144

Part No.	Description
30142	18K Elite™ - pre assembled
30144	18K Elite™ with Silder - pre assembled
30072	18K Elite™ with Silder

Note: Will not fit trucks with beds shorter than 6' in length unless used with Sidewinder™. Will not fit trucks with flareside/stepside.

ELITE™ SLIDER

Designed for short bed and extended cab short bed pickups to provide additional turning clearance and to prevent damage to truck and trailer in tight locations at low speeds.

- 10" travel • Fits 18K Elite™ fifth wheel • Round rail design allows for smooth operation
- Operation from either side of unit (handle can be mounted on either side)
- Angled steel rollers reduces binding • Operates even when vehicle not in straight line
- Operation up to 45° angle. • Lock pin for additional security
- Rubber grip handle for comfortable operation • Vertical adjustment is limited to 16" - 18"
- SAE J2638 Compliant



30070

Part No.	Description
30070	Elite™ Slider, for use with the 18K Elite™ fifth wheels only

ELITE™ RAIL KITS

Designed for use with the Elite™ Systems only.

- "Power Puck" mounting system provides uninhibited use of truck bed when fifth wheel or gooseneck is dismounted

CALL US FOR HELP WITH YOUR VEHICLE SPECIFIC RAIL KIT APPLICATION!



RAIL KIT MOUNTING ADAPTER

- Use with Ford OEM under-bed rail kit or Reese® Elite™ under-bed rail kits
- Works with any 15K, 16K, or 20K standard fifth wheel hitch



30156

Part No.	Description
30156	Rail Kit Mounting Adapter



FIFTH WHEEL HITCHES



30866



CONTOURED HANDLE



CAST HEAD & JAW



CAST PIVOT BEAM



30867



30870

REESE® TITAN 16K FIFTH WHEEL

Reese®, the brand that started the towing industry once again revolutionizes the fifth wheel hitch with the introduction of the new TITAN 16K. Reese® remains unmatched in safety, reliability and performance.

- 16,000 lbs. capacity / 4,000 lbs. pin weight capacity
- NEW CONTOURED HANDLE
 - Customized grip includes universal control instructions
 - New control handle eliminates separate latch and high visibility for system lock and load
- PREMIUM REESE ARCH
 - Pin mounting holes better align with current rail kits, reducing looseness
- SAE J2638 COMPLIANT
 - Based on heavy duty, accelerated life cycle criteria developed by SAE for fifth wheels
 - Fatigue and static tested to pass 900,000 cycles
- SIDEWINDER COMPATIBLE
 - Premium choice for short bed trucks
- NEW CAST HEAD
 - Commercial durability and strength
 - Improved head funneling for king pin to latch
 - Patent pending king pin indicator is highly visible
- NEW CAST JAW SYSTEM
 - Double jaw mechanism, heavier for longer wear, improved tolerances, eliminating chucking in jaw system
 - Improved life and wear with added grease points
- NEW CAST PIVOT BEAM
 - Incorporates a dual vibration isolator system for vertical and longitudinal vibration dampening and improved ride
 - Wider mounting for better stability and reduced wear
 - Easier assembly of cast pivot beam to cross member
 - Vertical height adjustment from 14" to 18"
 - Head and pivot beam can be offset 1" front or rear to maximize performance
- Requires rails & installation kit (sold separately)
- Optional slider available for additional turning clearance
- Limited lifetime warranty

Part No.	Description
30866	TITAN 16K Fifth Wheel Hitch
30869	TITAN 16K Fifth Wheel Hitch and Round Tube Slider
83003	TITAN 16K Fifth Wheel Lube Plate

Note: Will not fit trucks with beds shorter than 6' in length unless used with Sidewinder™. Will not fit trucks with flareside/stepside.

REESE® TITAN 20K FIFTH WHEEL

- 20,000 lbs. capacity / 5,000 lbs. pin weight capacity
- All TITAN16K features PLUS quadruple vibration isolator system for vertical and longitudinal vibration dampening and improved ride
- Custom lube plate included

Part No.	Description
30867	TITAN 20K Fifth Wheel Hitch
30870	TITAN 20K Fifth Wheel Hitch and Round Tube Slider

Note: Will not fit trucks with beds shorter than 6' in length unless used with Sidewinder™. Will not fit trucks with flareside/stepside.

FIFTH WHEEL HITCHES



30054

REESE® 30K FIFTH WHEEL LOW PROFILE HITCH



- 30,000 lbs. capacity; 7,500 lbs. pin weight capacity
- Can be vertically adjusted 3" to permit level trailering (9-1/2" to 12-1/2") above vehicle deck
- Side-tilt design reduces vehicle frame stress, creating a smoother, more comfortable ride and making hook-up and un-hook much easier
- Specially designed and engineered for the serious tower, primarily on medium-duty conversion trucks
- Actuating handle is more easily accessible than most fifth wheels, making hook-up quick and convenient
- Limited lifetime warranty

Part No.	Description
30054	Reese® 30K Fifth Wheel Complete Base rails not used with this model. Mounts directly to medium-duty truck.

Note: Will not fit trucks with beds shorter than 6' in length unless used with Sidewinder™. Will not fit trucks with flareside/stepside.



Includes 90° Wire Harness
50-97-410

30033

REESE® 22K FIFTH WHEEL



Features side-to-side pivot to better accommodate hook-ups on uneven ground. Quick installation, strong, reliable performance and easy removal to allow full truck bed access.

- 22,000 lbs. capacity; 5,500 lbs. pin weight capacity
- Two-jaw locking system
- Fore-and-aft and side-to-side pivot
- Locking jaw handle
- Vertically adjusts from 14-1/4" to 18-1/4"
- Solid base assembly for superior stability
- Requires rails & installation kit (sold separately)
- Limited lifetime warranty

Part No.	Description
30033	Reese® 22K Fifth Wheel

Rails and installation kit must be ordered separately (#30035).

Note: Will not fit trucks with beds shorter than 6' in length unless used with Sidewinder™. Will not fit trucks with flareside/stepside.

REPLACEMENT PARTS

Part No.	Description
30729	22K Head Assembly with pivot beam (Reese®)
30730	22K Base Assembly with adj. brackets (Reese®)



30047

REESE® 16K FIFTH WHEEL



Featuring side-to-side pivot action to better accommodate hook-ups on uneven ground. Quick-easy installation, strong performance and easy removal in just seconds to allow full access to the truck bed.

- 16,000 lbs. capacity; 4,000 lbs. pin weight capacity
- Two-jaw locking system
- Fore-and-aft and side-to-side 4°-5° pivot
- Locking jaw handle
- Vertically adjusts from 14-1/2" to 18"
- Wide stance one-piece legs for improved stability
- Requires rails & installation kit (sold separately)
- Limited lifetime warranty

Part No.	Description	Adjustment Heights
30047	Reese® 16K Fifth Wheel	14-1/2" to 18"
30051	Reese® 16K Fifth Wheel	15" to 18" with square tube slider
30075	Reese® 16K Fifth Wheel	15" to 18" with round tube slider

Rails and installation kit must be ordered separately (#30035).

Note: Will not fit trucks with beds shorter than 6' in length unless used with Sidewinder™. Will not fit trucks with flareside/stepside.

REPLACEMENT PARTS



30727

Part No.	Description
58146	Fifth Wheel Head only (service kit)
58147	Cross Member – head support only
30727	Fifth Wheel Legs only (set of two)

FIFTH WHEEL HITCHES

THE FIFTH WHEEL YOU KNOW, BUT BETTER!



30081
Reese® 20K fifth wheel



30083
Reese® 20K fifth wheel offered with round tube slider



30084
Reese® 20K fifth wheel offered with square tube slider



TOWING HAS NEVER BEEN EASIER WHEN USING THE REESE® 20K FIFTH WHEEL SYSTEM.

Features our Elite™ head, with the base and mounting kit that you already know & love from our Reese® line of fifth wheel hitches! The above bed rail system uses the popular universal mounting kit 30035 (sold separately) or the vehicle specific custom quick install kits which reduce install time by up to fifty percent.

REESE® 20K FIFTH WHEEL

- 20,000 lbs. capacity / 5,000 lbs. pin weight capacity
- 14" to 18" vertical height adjustment
- Features Elite™ Series head...Tough, heavy-duty stamped head looks just like the ones on the real tractor-trailers!
- 4 way (front & back/side-to-side) head pivot
- 6° side-to-side head pivot
- King pin indicator
- Increased king pin contact design
- Wider 9" king pin funnel area
- Forged single jaw
- Self-latching jaw design
- Limited lifetime warranty

Part No.	Description
30081	Reese® 20K Fifth Wheel
30083	Reese® 20K Fifth Wheel with round tube slider
30084	Reese® 20K Fifth Wheel with square tube slider

Rails and installation kit must be ordered separately (#30035).

Note: Will not fit trucks with beds shorter than 6' in length unless used with Sidewinder™. Will not fit trucks with flareside/stepsides.

REESE® OUTBOARD MOUNTING RAILS

- SAE J2638 COMPLIANT
 - Based on heavy duty, accelerated life cycle criteria developed by SAE for fifth wheels
 - J2638 are fatigue and static requirements based on the European style test of 900,000 cycles
- HARDWARE
 - Grade 8 hardware, meets all Canadian requirements
- FAST CUSTOM MOUNT SYSTEM
 - Rails are wider (48") for faster install, because the mounting points are outside the truck frame, allowing the installer to avoid under-bed components



30153



58467

Part No.	Description
30153	Reese® Outboard Fifth Wheel Mounting Rails Only (10 bolt design)
ACCESSORY PARTS	
58467	4 Hole Style Pins (Qty. 4) & Clips (Qty. 4) for Reese Outboard Fifth Wheel Mounting Rails #30153

REESE® OUTBOARD INSTALLATION BRACKETS AND KITS

- Vehicle specific Reese Outboard Fifth Wheel Custom Quick Install Brackets available
- Kits also available that include Reese Outboard Fifth Wheel Mounting Rails and Vehicle Specific Brackets



CALL US FOR HELP WITH YOUR VEHICLE SPECIFIC OUTBOARD BRACKET APPLICATION!

FIFTH WHEEL HITCHES / SLIDERS



30132

PRO SERIES™ 20,000 LBS. FIFTH WHEEL HITCHES



- 20,000 lbs. capacity; 5,000 lbs. pin weight capacity
- Full floating head for improved hooking and unhooking, as well as ride
- Dual jaw system completely surrounds the king pin for significantly reduced wear
- Lubricated and clamped side joints for tight and efficient operation
- Lightweight, easy to install and remove
- Adjustable height, from 13" to 17"
- Sturdy, robust and reliable
- One-piece formed legs, provides a wider footprint for superior stability
- Sidewinder compatible, preferred for short bed pickups
- Fits universal 4-bolt rail kit (P/N 30095) Must utilize center attachment points for 20K capacities included with 20K Fifth Wheel Hitches) or 10-bolt rail kit (P/N 30035)
- Compatible slider system available
- 10 year limited warranty

Part No.	Description
30132	Pro Series™ 20,000 lbs. Fifth Wheel Head, Support, Legs, and Rails (10 bolt)

Note: Will not fit trucks with beds shorter than 6' in length unless used with Sidewinder™. Will not fit trucks with flareside/stepside.

PRO SERIES™ 20,000 LBS. FIFTH WHEEL HITCHES WITH SQUARE TUBE SLIDER



30133


Designed for shortbed trucks to provide clearance and prevent damage to truck and trailer in tight spaces at slow speeds

- 20,000 lbs. capacity; 5,000 lbs. pin weight capacity
- 10" travel front to back
- Adjustable with trailer attached
- Can be used with full size or mini trucks
- Dual jaw system completely surrounds the king pin for significantly reduced wear
- Full floating head for improved hooking and unhooking, as well as ride
- Jaw handle with tab for optional padlock security (padlock not included)
- Vertically adjusts from 13" to 17" to best match-up with different trailers
- Wide stance one-piece legs for improved stability
- 10 year limited warranty



Part No.	Description
30133	Pro Series™ 20,000 lbs. Fifth Wheel Hitch Head, Support, Pro Series™ Slider, and Rails (10 bolt)

Note: Will not fit trucks with beds shorter than 6' in length unless used with Sidewinder™. Will not fit trucks with flareside/stepside.



30048

Designed for short bed trucks and extended cab short bed pickups to provide additional turning clearance and to prevent damage to truck when spotting trailer. Fits Pro Series™ and 16K Select Series Fifth Wheel Hitches.

SQUARE TUBE SLIDER (KWIK-SLIDE®)



- 6 roller design
- 10" travel fore-and-aft
- Works with full size and compact trucks
- Fully adjustable with trailer attached
- Minimum 13" extended trailer pin box recommended
- Requires #30035 or #30095 Universal Base Rail Kit (sold separately)

Part No.	Description
30048	Kwik-Slide® Slider for 16K Select Series fifth wheel hitches

Rails and installation kit must be ordered separately (#30035, 10-bolt).

Rails and installation kit must be ordered separately (#30095, 4-bolt).

Note: Check clearance between king pin bed and tailgate before moving to maneuvering position.



Requires #30035 or #30095 universal base rail kit (sold separately)



FIFTH WHEEL HITCHES / SLIDERS



31859

PRO SERIES™ 16,000 LBS. FIFTH WHEEL HITCHES



- 16,000 lbs. capacity; 4,000 lbs. pin weight capacity
- Full floating head for improved hooking and unhooking, as well as ride
- Dual jaw system completely surrounds the king pin for significantly reduced wear
- Lightweight, easy to install and remove
- Adjustable height, from 13" to 17"
- One-piece formed legs, provides a wider footprint for superior stability
- Sidewinder compatible, preferred for short bed pickups
- Compatible slider system available
- Sturdy, robust and reliable
- 10 year limited warranty

Part No.	Description
31859	Pro Series™ 16,000 lbs. Fifth Wheel Hitch Head, Support, Legs, and Rails (10 bolt)

Note: Will not fit trucks with beds shorter than 6' in length unless used with Sidewinder™. Will not fit trucks with flareside/stepside.



31860


PRO SERIES™ 16,000 LBS. FIFTH WHEEL HITCH WITH SQUARE TUBE SLIDER

Designed for shortbed trucks to provide clearance and prevent damage to truck and trailer in tight spaces at slow speeds

- 16,000 lbs. capacity; 4,000 lbs. pin weight capacity
- Dual jaw system completely surrounds the king pin for significantly reduced wear
- 10" travel front to back
- Adjustable with trailer attached
- Can be used with full size or mini trucks
- Full floating head for improved hooking and unhooking, as well as ride
- Jaw handle with tab for optional padlock security (padlock not included)
- Vertically adjusts from 13" to 17" to best match-up with different trailers
- Wide stance one-piece legs for improved stability
- 10 year limited warranty

Part No.	Description
31860*	Pro Series™ 16,000 lbs. Fifth Wheel Hitch Head, Support, Pro Series™ Slider, and Rails (10 bolt)

Note: Will not fit trucks with beds shorter than 6' in length unless used with Sidewinder™. Will not fit trucks with flareside/stepside.

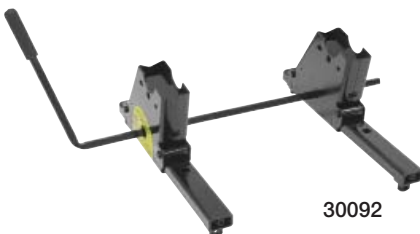

30092

PRO SERIES™ FIFTH WHEEL SLIDER UNIT W/ROLLERS



- 4 roller design
- 10" travel fore-and-aft
- Works with full size and compact trucks
- Fully adjustable with trailer attached
- Minimum 13" extended trailer pin box recommended
- Requires #30035 or #30095 Universal Base Rail Kit (sold separately)
- 10 year limited warranty

Requires #30035 or #30095 universal base rail kit (sold separately)

Part No.	Description
30092	Pro Series™ Fifth Wheel Slider Unit w/Rollers for 15K, 16K and 20K Head Assemblies (requires head assembly)

*Rails and installation kit must be ordered separately (#30035, 10-bolt).
Rails and installation kit must be ordered separately (#30095, 4-bolt).*

Note: Check clearance between king pin bed and tailgate before moving to maneuvering position.

FIFTH WHEEL HITCH ACCESSORIES



FIFTH WHEEL RAILS & INSTALLATION KITS

Rails and installation kits for full-size trucks. Quick and easy installation with full truck bed access. For use on all fifth wheel hitches except Elite™ (formerly Signature Series).

FIFTH WHEEL MOUNTING RAILS



Part No.	Description
58058	Fifth Wheel Mounting Rails Only - No Hardware Included (10 - Bolt Design)
30153	Reese Outboard Fifth Wheel Mounting Rails Only (10 - Bolt Design)
58503	Fifth Wheel Mounting Rails Accessory, Corrugation Spacer Kit for #30035/#30153/#58058 (10 - Bolt Design)

FIFTH WHEEL INSTALLATION KITS



Part No.	Description
30035	Fifth Wheel Rails and Installation Kit, Includes Brackets and Hardware (10 - Bolt Design) (May Require Additional Kit - See Application Guide)
30124	Fifth Wheel Rails and Installation Kit, Includes Brackets and Hardware (4- Bolt Design) (May Require Additional Kit - See Application Guide)
30439	Installation Kit w/Hardware and Brackets for #30035, #58058 (10 - Bolt Design)
58166	Fifth Wheel Tube Spacer Kit (Optional for #30035)
58208	Chevrolet Composite Bed Kit for Above the Bed Rail Kit #30035 (10 - Bolt Design) used w/Select Series Fifth Wheels & 25K Above-Bed Gooseneck

ELITE™ & REESE® FIFTH WHEEL LUBE PLATES



Nylon lube plate protects fifth wheel plate from the wear of normal towing

- Eliminates the need for messy grease

Part No.	Description
83001	12" Lube Plate for use with Elite™ & Reese® 20K fifth wheel hitches only
83002	Fifth Wheel 10" Lube Plate for Reese® 16K & 22K fifth wheels

FIFTH WHEEL LUBE PLATE



- Large surface for extra protection

Part No.	Description
6011	Fifth Wheel 10" Lube Plate for 16K and 22K Select Series™ & Pro Series™ Fifth Wheels

CHAIN BRACKET KIT

Fits Reese® fifth wheel rails and most popular brands. Provides secure attachment for trailer safety chains.

Part No.	Description
50223	Chain Bracket Kit, 18,000 lbs. each

PULL PIN LOCK PLATES

- Prevents theft of fifth wheel and unwanted removal of pull pins
- Add a standard padlock to make the locking plate a security device

Part No.	Description
58093	Pin Lock Plates for 1/2" pull pins for fifth wheels (4 pack)

FIFTH WHEEL & KING PIN LOCKS

Part No.	Description
KING PIN LOCKS	
KPL200	Fifth Wheel King Pin Lock, Extruded T6 Tempered Aluminum Body
RAIL LOCK	
63254	Fifth Wheel Rail Lock, Push Button, Replaces One Locking Pin